




## Ustore Soluções Hiperconvergente

### uHC-1000 séries

### 2 Lâminas por appliance

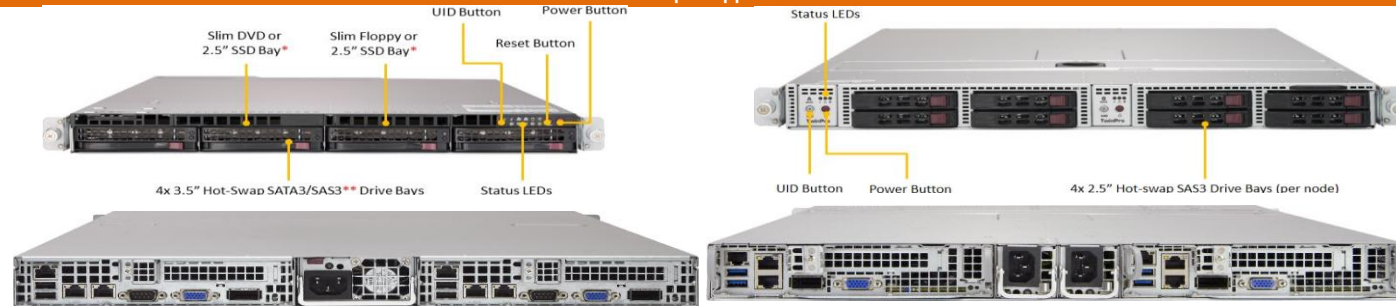

Modelo	uHC-1235**		uHC-1225	
Processadores	Single ou Dual - Família E5-26xx V3 e V4 - LGA 2011 ou Scalable LGA 3647 (Bronze, Silver, Gold e Platinum)		Scalable LGA 3647 (Bronze, Silver, Gold e Platinum)	
Armazenamento	Híbrido (HDD + SSD e/ou NVMe*) 2 x 3,5" - SSD e HDD - all sizes (GB) por lâmina 1 x NVMe PCIe - all sizes (GB) por lâmina	All Flash (Full SSD e/ou NVMe*) 2 x 3,5" - SSD - all sizes (GB) por lâmina 1 x NVMe PCIe - all sizes (GB) por lâmina	Híbrido (HDD + SSD e/ou NVMe*) 4 x 2,5" - SSD e HDD - all sizes (GB) por lâmina 1 x NVMe PCIe - all sizes (GB) por lâmina	All Flash (Full SSD e/ou NVMe*) 4 x 2,5" - SSD - all sizes (GB) por lâmina 1 x NVMe PCIe - all sizes (GB) por lâmina
Memória	up to 2TB, DDR4, ECC, 2400MHz (por lâmina)		up to 2TB, DDR4, ECC, 2400MHz (por lâmina)	
Conexões de Rede	Dual 1Gbs RJ45, Dual 1Gbs LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+	Dual 1Gbs RJ45, Dual 1Gbs LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+	Dual 1Gbs RJ45, Dual 1Gbs LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+	Dual 1Gbs RJ45, Dual 1Gbs LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+
Certificações	CSAus, FCC, CSA, ICES, CE, KCC, RCM, VCCI-A, BSMI, EAC, SABS, INMETRO, S-MARK, UKRSEPRO, BIS			
Dimensões (W x H x D)	437 x 44,45 x 705 mm	437 x 44,45 x 705 mm	437 x 43 x 718 mm	437 x 43 x 718 mm
Peso	Gross Weight: 41 lbs (19.5 kg)		Gross Weight: 41 lbs (21.9 kg)	
Refrigeração	3x 40x56mm counter-rotation PWM fans (por lâmina)		5x80mm heavy duty fans with PWM fan speed controls	
Ambiente Operacional	Operating Temperature: 10° C - 35° C Non-operating Temperature: -40° C to 70° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)		Operating Temperature: 10° C - 35° C Non-operating Temperature: -40° C to 70° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	
Power Supply (Dual Supply / Block)	1000W Non-Redundant 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz		1000W Redundant 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	
Operating Requirements	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz		Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	

\* PCIe

\*\* Não possui fonte redundante

Foto apenas ilustrativa podendo sofrer pequenas alterações.