




Ustore Soluções Hiperconvergente

uHC-2000 séries

1 Lâmina por appliance

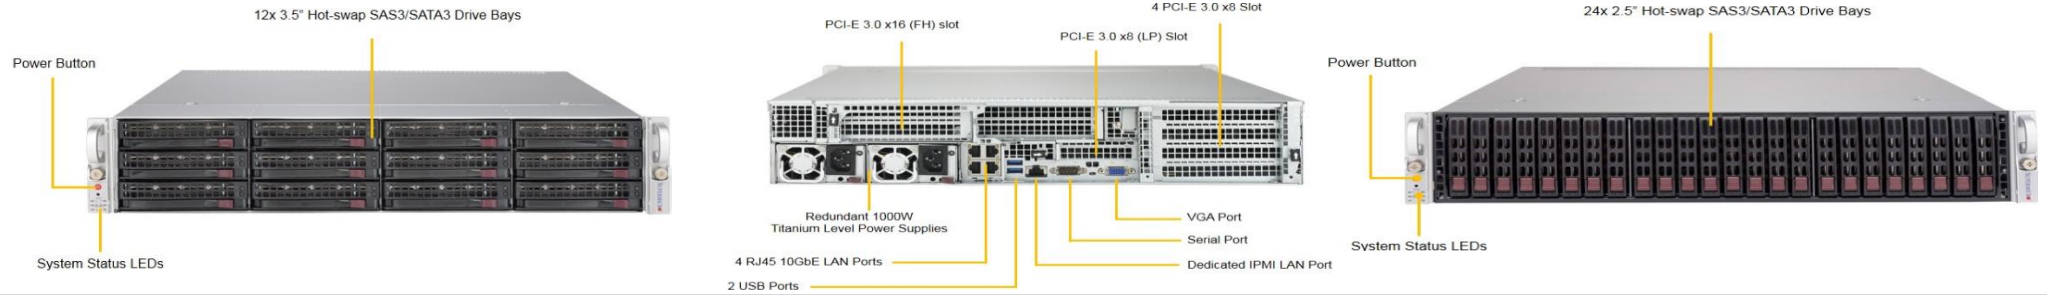

Modelo	uHC-2135		uHC-2125	
Processadores	Single ou Dual - Família E5-26xx V3 e V4 - LGA 2011 ou Scalable LGA 3647 (Bronze, Silver, Gold e Platinum)			
Armazenamento	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e/ou NVMe*)	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e/ou NVMe*)
Memória	12 x 3,5" - SSD e HDD - all sizes (GB) 4 x NVMe PCIe - all sizes (GB)	12 x 3,5" - SSD - all sizes (GB) 4 x NVMe PCIe - all sizes (GB)	24 x 2,5" - SSD e HDD - all sizes (GB) 4 x NVMe PCIe - all sizes (GB)	24 x 2,5" - SSD - all sizes (GB) 4 x NVMe PCIe - all sizes (GB)
Conexões de Rede	up to 3 TB, DDR4, ECC, 2666MHz	up to 3 TB, DDR4, ECC, 2666MHz	up to 3 TB, DDR4, ECC, 2666MHz	up to 3 TB, DDR4, ECC, 2666MHz
Certificações	Dual 1Gbs RJ45, Dual 1Gbs LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+			
Dimensões (W x H x D)	CSAus, FCC, CSA, ICES, CE, KCC, RCM, VCCI-A, BSMI, EAC, SABS, INMETRO, S-MARK, UKRSEPRO, BIS			
Peso	437 x 89 x 705.3 mm	437 x 89 x 705.3 mm	437 x 89 x 705.3 mm	437 x 89 x 705.3 mm
Refrigeração	Net Weight: 72 lbs (16.4 kg) Gross Weight: 36 lbs (32.7 kg)	Net Weight: 72 lbs (16.4 kg) Gross Weight: 36 lbs (32.7 kg)	Net Weight: 72 lbs (16.4 kg) Gross Weight: 36 lbs (32.7 kg)	Net Weight: 72 lbs (16.4 kg) Gross Weight: 36 lbs (32.7 kg)
Ambiente Operacional	4x80mm heavy duty fans with PWM fan speed controls	4x80mm heavy duty fans with PWM fan speed controls	4x80mm heavy duty fans with PWM fan speed controls	4x80mm heavy duty fans with PWM fan speed controls
Fonte de Alimentação	Operating Temperature: 5° C - 40° C Non-operating Temperature: -40° C to 60° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	Operating Temperature: 5° C - 40° C Non-operating Temperature: -40° C to 60° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	Operating Temperature: 5° C - 40° C Non-operating Temperature: -40° C to 60° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	Operating Temperature: 5° C - 40° C Non-operating Temperature: -40° C to 60° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)
Requerimentos Operacionais	1000W Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	1000W Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	1000W Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	1000W Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz
* PCIe	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz

Foto ilustrativa