




# Ustore Soluções Hiperconvergente

## uHC-2000 séries

## 2 Lâminas por appliance

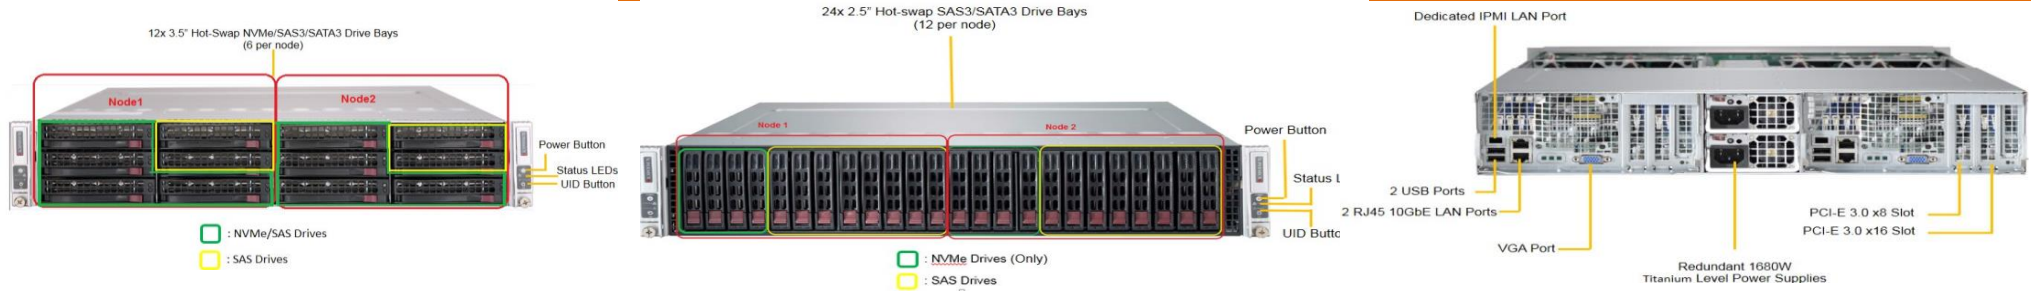

Modelo	uHC-2235		uHC-2225	
Processadores	Single ou Dual - Família E5-26xx V3 e V4 - LGA 2011 ou Scalable LGA 3647 (Bronze, Silver, Gold e Platinum)			
Armazenamento	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e/ou NVMe*)	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e ou NVMe*)
Memória	6 x 3,5" - SSD e HDD - all sizes (GB) por lâmina 2 x NVMe PCIe - all sizes (GB) por lâmina	6 x 3,5" - SSD - all sizes (GB) por lâmina 2 x NVMe PCIe - all sizes (GB) por lâmina	12 x 3,5" - SSD e HDD - all sizes (GB) por lâmina 2 x NVMe PCIe - all sizes (GB) por lâmina	12 x 3,5" - SSD - all sizes (GB) por lâmina 2 x NVMe PCIe - all sizes (GB) por lâmina
Conexões de Rede	up to 2 TB, DDR4, ECC, 2400MHz por lâmina	up to 2 TB, DDR4, ECC, 2400MHz por lâmina	up to 2 TB, DDR4, ECC, 2400MHz por lâmina	up to 2 TB, DDR4, ECC, 2400MHz por lâmina
Certificações	Dual 1Gbs RJ45, Dual 1Gbs LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+			
Dimensões (W x H x D)	438 x 88 x 774 mm		438 x 88 x 730 mm	
Peso	Net Weight: 66 lbs (29.9 kg) Gross Weight: 85 lbs (38.6 kg)		Net Weight: 66 lbs (29.9 kg) Gross Weight: 85 lbs (38.6 kg)	
Refrigeração	4x80mm heavy duty fans with PWM fan speed controls		4x80mm heavy duty fans with PWM fan speed controls	
Operating Environment	Operating Temperature: 10° C - 35° C Non-operating Temperature: -40° C to 70° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)		Operating Temperature: 10° C - 35° C Non-operating Temperature: -40° C to 70° C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	
Power Supply (Dual Supply / Block)	1600W 1U Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz		1600W 1U Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	
Operating Requirements	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz		Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	

\* PCIe e 2,5"  
Foto ilustrativa