




# Ustore Soluções Hiperconvergente

## uHC-1000 séries

## 1 Lâmina por appliance

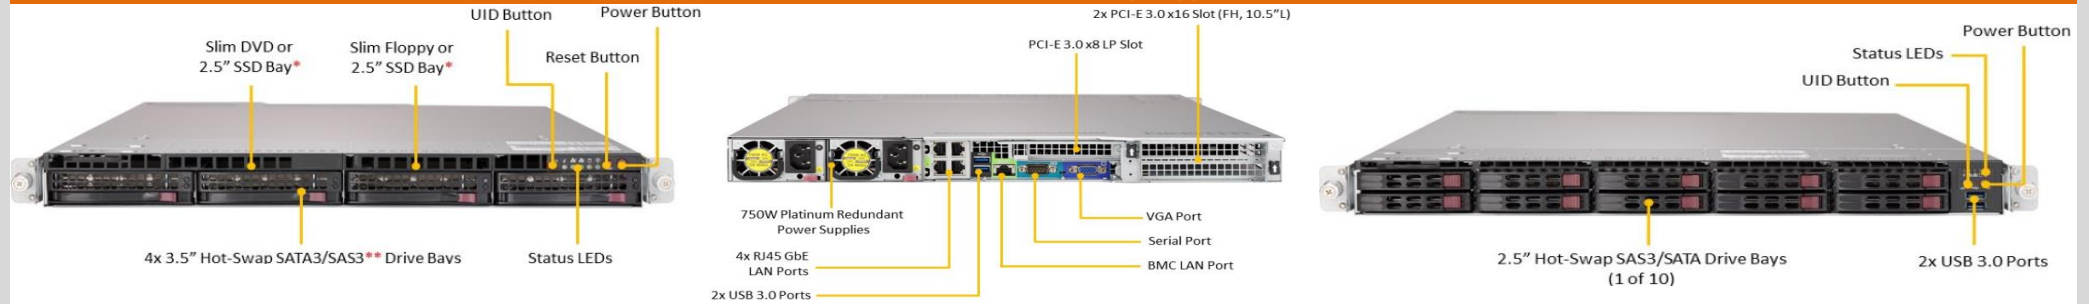

Modelo	uHC-1035		uHC-1025	
Processadores	Single ou Dual - Família E5-26xx V3 e V4 - LGA 2011 ou Scalable LGA 3647 (Bronze, Silver, Gold e Platinum)			
Armazenamento	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e/ou NVMe*)	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e/ou NVMe*)
Memória	4 x 3,5" - SSD e HDD - all sizes (GB) 1 x NVMe PCIe - all sizes (GB)	4 x 3,5" - SSD - all sizes (GB) 1 x NVMe PCIe - all sizes (GB)	8 x SSD e HDD - all sizes (GB) 1 x NVMe PCIe - all sizes (GB)	8 x SSD - all sizes (GB) 1 x NVMe PCIe - all sizes (GB)
Conexões de Rede	up to 3TB, DDR4, ECC, 2666MHz	up to 3TB, DDR4, ECC, 2666MHz	up to 2TB, DDR4, ECC, 2400MHz	up to 2TB, DDR4, ECC, 2400MHz
Certificações	Dual 1Gbs RJ45, Dual 1Gbs LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+			
Dimensões (W x H x D)	CSAus, FCC, CSA, ICES, CE, KCC, RCM, VCCI-A, BSMI, EAC, SABS, INMETRO, S-MARK, UKRSEPRO, BIS			
Peso	437 x 43 x 737 mm	437 x 43 x 737 mm	437 x 43 x 707 mm	437 x 43 x 707 mm
Refrigeração	Net Weight: 26 lbs (11.8 kg) Gross Weight: 41 lbs (18.6 kg)	Net Weight: 26 lbs (11.8 kg) Gross Weight: 41 lbs (18.6 kg)	Net Weight: 26 lbs (11.8 kg) Gross Weight: 41 lbs (18.6 kg)	Net Weight: 26 lbs (11.8 kg) Gross Weight: 41 lbs (18.6 kg)
Ambiente Operacional	8 Heavy duty fans with optimal fan speed control	8 Heavy duty fans with optimal fan speed control	8 Heavy duty fans with optimal fan speed control	8 Heavy duty fans with optimal fan speed control
Power Supply (Dual Supply / Block)	Operating Temperature: 10°C - 35°C Non-operating Temperature: -40°C to 70°C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	Operating Temperature: 10°C - 35°C Non-operating Temperature: -40°C to 70°C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	Operating Temperature: 10°C - 35°C Non-operating Temperature: -40°C to 70°C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	Operating Temperature: 10°C - 35°C Non-operating Temperature: -40°C to 70°C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)
Operating Requirements	750W Redundant 80 Plus Platinum ou Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	750W Redundant 80 Plus Platinum ou Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	750W Redundant 80 Plus Platinum ou Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	750W Redundant 80 Plus Platinum ou Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz
	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz

\* PCIe  
Foto ilustrativa