




Ustore Soluções Storage

uST séries

1 Lâmina por appliance

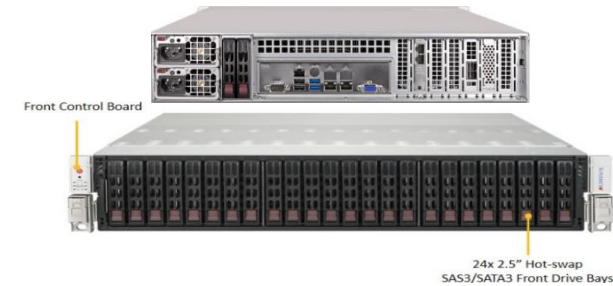

Modelo	uST-235		uST-225	
Processadores	Single ou Dual - Família E5-26xx V3 e V4 - LGA 2011 ou Scalable LGA 3647 (Bronze, Silver, Gold e Platinum)			
Armazenamento	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e/ou NVMe*)	Híbrido (HDD + SSD e/ou NVMe*)	All Flash (Full SSD e/ou NVMe*)
Memória	up to 2TB, DDR4, ECC, 2666MHz		up to 2TB, DDR4, ECC, 2666MHz	
Conexões de Rede	Dual 1Gbps RJ45, Dual 1Gbps LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+	Dual 1Gbps RJ45, Dual 1Gbps LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+	Dual 1Gbps RJ45, Dual 1Gbps LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+	Dual 1Gbps RJ45, Dual 1Gbps LOM, Dual 10Gb SPF+, Dual 10Gb Base-T, Quad 10Gb SPF+, 1x 1Gbps IPMI, Add-on NIC (Optional): Dual-Port 10 GbE SFP+, Dual-Port 10 GbE BASE-T, or Quad-Port 10 GbE SFP+
Certificações	CSAus, FCC, CSA, ICES, CE, KCC, RCM, VCCI-A, BSMI, EAC, SABS, INMETRO, S-MARK, UKRSEPRO, BIS			
Dimensões (W x H x D)	437 x 89 x 630 mm		437 x 89 x 630 mm	
Peso	Gross Weight: 61 lbs (27.7 kg)		Gross Weight: 61 lbs (27.7 kg)	
Refrigeração	3 Hot-swap 80mm redundant PWM cooling fans		3 Hot-swap 80mm redundant PWM cooling fans	
Operating Environment	Operating Temperature: 10°C - 35°C Non-operating Temperature: -40°C to 60°C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)		Operating Temperature: 10°C - 35°C Non-operating Temperature: -40°C to 60°C Operating Relative Humidity: 8% to 90% (non-cond.) Non-operating Relative Humidity: 5% to 95% (non-cond.)	
Power Supply (Dual Supply / Block)	1200W Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz		1200W Redundant Power Supplies with PMBus 80 Plus Titanium Level 100-127Vac, 50-60Hz 200-240Vac, 50-60Hz	
Operating Requirements	Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz		Input Voltage: 100-240V AC auto-range, Input Frequency: 50-60Hz	

* PCIe
Foto ilustrativa

